

HC882E



When precision matters.®

HC882E Embedded Triple Band Helical Antenna + L-band

Frequency Coverage: L1/L2/G1/G2/G3/E1/E5b/B1/B2 + L-band


Overview

The lightweight HC882E embedded helical antenna, which covers the GPS L1/L2, GLONASS G1/G2/G3, Galileo E1/E5b, and BeiDou B1/B2 frequency bands, as well as L-band correction services, is designed and crafted for precision positioning for OEM applications.

Weighing 12 g, the lightweight HC882E features a precision-tuned helix element that provides excellent axial ratios and operates without the requirement of a ground plane, making it ideal for a wide variety of applications including Unmanned Aerial Vehicles (UAVs).

The HC882E features an industry-leading low current, Low Noise Amplifier (LNA) that includes an integrated low-loss pre-filter to protect against harmonic interference from high amplitude interfering signals, such as 700 MHz band LTE and other near in-band cellular signals.

Tallysman offers custom tuning services to optimize the performance of the HC882E for any OEM installation environment.

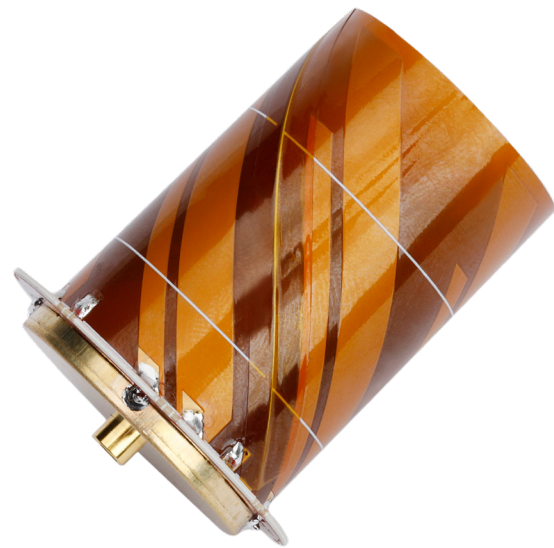

Applications

- Autonomous, Unmanned Aerial Vehicles
- Precision GPS positioning
- Dual Frequency RTK receivers
- Mission-critical GPS timing
- Military & security
- Network timing and synchronization

Features

- Very low noise preamp, 1.6 dB
- Axial ratio: ≤ 0.5 dB max.
- LNA gain 28 dB typ. or 35 dB typ.
- Low current: 15 mA typ. or 21 mA typ.
- ESD circuit protection: 15 kV
- Invariant performance from: +2.2 to 16 VDC

Benefits

- Extremely lightweight (12 g)
- Ideal for RTK surveying systems
- Great multipath rejection
- Increased system accuracy
- Excellent signal to noise ratio
- IP67, REACH, and RoHS compliant

About Tallysman: With global headquarters and manufacturing in Ottawa, Canada, Tallysman is a leading manufacturer of high-precision antennas and components for Global Navigation Satellite System (GNSS) applications. Tallysman's mission is to support the needs of a new generation of positioning systems by delivering unprecedented antenna precision at competitive prices. Learn more at www.tallysman.com

Contact us:
info@tallysman.com
T: +1 613 591-3131

HC882E Embedded Triple Band Helical Antenna + L-band

Frequency Coverage: L1/L2/G1/G2/G3/E1/E5b/B1/B2 + L-band

Antenna

Architecture Triple Frequency, RHCP Quadrifilar Helix

| | | Gain dBic typ. at Zenith | Axial Ratio dB at Zenith |
|--------------------------------------|-----|-----------------------------|-----------------------------|
| GNSS | | | |
| GPS/QZSS | L1 | 2.4 | ≤ 0.5 max. |
| | L2 | 2.0 | ≤ 0.5 max. |
| | L5 | - | - |
| GLONASS | G1 | 1.2 | ≤ 0.5 max. |
| | G2 | 2.5 | ≤ 0.5 max. |
| | G3 | 2.2 | ≤ 0.5 max. |
| Galileo | E1 | 2.4 | ≤ 0.5 max. |
| | E5a | - | - |
| | E5b | 2.2 | ≤ 0.5 max. |
| | E6 | - | - |
| BeiDou | B1 | 2.8 | ≤ 0.5 max. |
| | B2 | 2.2 | ≤ 0.5 max. |
| | B2a | - | - |
| | B3 | - | - |
| IRNSS/NavIC | L5 | - | - |
| QZSS | L6 | - | - |
| L-band Services (1525 MHz - 1559MHz) | | 2.5 | ≤ 0.5 max. |
| Satellite Communications | | | |
| Iridium | | - | - |
| Globalstar | | - | - |

Mechanical

Mechanical Size 49.7 mm (H) x 30 mm (Dia)

Available Connectors SMA Male

Weight 12 g

Environmental

Operating Temp. Range ... -40°C to +85°C

Vibration 3-axis, sweep = 15 min, 10 to 200 Hz
sweep: 3 G

Shock Vertical axis: 50 G, other axes: 30 G

Compliance IP67, RoHS and REACH compliant

Other

Warranty One year – parts and labour

Ordering Information

HC882E - Triple Band Embedded Helical Antenna With L-band Services

Part Number: 33-HC882E-xx, where xx = Gain in dB

Low Noise Amplifier (LNA) (Measured a Vcc = 3V, Temperature=25°C)

Frequency Bandwidth ... 1525-1606 MHz, 1189-1254 MHz

Architecture Pre-filtered

Out-of-Band Rejection ... **Upper Band:**
 < 1400 MHz > 36 dB
 < 1450 MHz > 44 dB
 > 1700 MHz > 28 dB

Lower Band:
 < 1000 MHz > 63 dB
 < 1100 MHz > 38 dB
 < 1130 MHz > 30 dB

Gain 28 dB typ. or 35 dB typ.

Noise Figure 1.6 dB typ.

VSWR <1.5:1 typ. 1.8:1 max.

Supply Voltage Range +2.2 to 16 VDC

Supply Current 15 mA typ. or 21 mA typ. at 25°C.

ESD Circuit Protection ... 15 kV air discharge

EMI Immunity 50 V/m, excepting L1+/-100 MHz and L2
 +/- 100 MHz

HC882E Dimensions (mm)

